






SL-350 Balanced Flue Log Fire

350 Specifications


MODEL	HEIGHT		FRONT WIDTH		BACK WIDTH		DEPTH		VIEWING AREA	mjh INPUT	kWh OUTPUT
350TRSI-AU	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	610 × 835	NG 21 LPG 20	NG 4.5 LPG 4.3
	777	835	837	865	577	865	414	420			

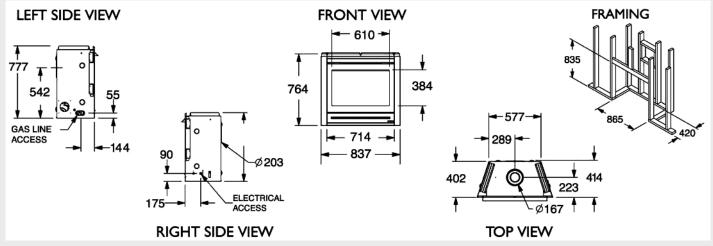

Dimensions above are in millimeters and for reference only. We recommend measuring individual units at installation. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Actual product appearance, including flame, may differ from product images.







NOTE: Crimped/capped-off copper gas line to be provided close to the bottom left hand side within the opening. Single non-switch GPO/413 socket to be provided close to bottom right hand side within opening.

SL-350 features

- Top or rear venting options provide installation flexibility. I 70mm top venting/205mm top or rear venting
- · Zero Clearance provides ease of installation and cost savings
- IntelliFire Pus Ignition System
- Balanced flue technology provides a sealed combustion chamber, maintaining indoor air quality
- Energy saving 77% efficiency with the authenticity of a traditional fire
- Multi-function remote provides temperature, flame height, thermostat and timer mode, offering true convenience - never again bend down to start your fireplace
- Variable valve allows adjustment of flame height and heat output
- · Realistic ceramic fiber campfire style logs
- Shallow 415mm depth makes it ideal for small spaces
- · Standard dress guard with mesh provides clean lines and safety
- Three speed fan with auto on/off
- AGA #5668

Balanced Flue Gas Fireplace

A completely sealed system, Heat & Glo balanced flue gas fireplaces draw 100% of combustion air from the outdoors and exhaust all combustion byproducts back outside, with no affect on indoor air quality. In addition, cold air drafts are eliminated and heat output is maximised. No electricity, power venting or fan are required to operate, eliminating the need for a conventional chimney, and allowing for installation in nearly any room of the home.TR technology, another Heat & Glo invention, allows for venting off the top or rear, providing even greater placement flexibility.

INTELLIFIRE PLUS IGNITION SYSTEM AND WIRELESS CONTROLS

The Intellifire Plus Ignition System is an "intelligent" control system providing energy conservation and the comfort of a roaring fire, all at your fingertips!

Intellifire Plus features intermittent pilot ignition (IPI) allowing you to conserve fuel and money when the fireplace is not in use. In addition, the system offers seamless transition

from AC to battery backup in a power outage, as well as built-in safety features and memory settings. Lastly, our new Intellifire Plus remote control provides stylish and fully features benefits that make controlling your heat easier than ever.

INTELLIFIRE PLUS RC300

Incorporates an LCD screen, intuitive menus and large control buttons in a sleek and modern design. This wireless control gives you the flexibility to use as a remote only or mount on the wall anywhere in the room.

MODEL: RC300-HNG

Features: Auto Battery Backup, Pilot Activation, ON/Off, Flame Height, Fan Speed, Room Temperature Readout, Thermostat Mode, Wall Docking Station.



Showroom Mon-Fri 9am-5pm, Sat 9am-1pm 277 Lord Street, Perth | 08 9228 2600 sales@fireplacecorner.com.au www.fireplacecorner.com.au



