



FIREPLACE CORNER




SLR-X

HEAT & GLO
BALANCED FLUE GAS FIREPLACE


SLR-X FRAMING SPECIFICATIONS

UNIT	WIDTH FRAMING - (A)	HEIGHT FRAMING (B)	DEPTH FRAMING - (C)	FLUE FRAMING - (D)	WIDTH ACTUAL	HEIGHT ACTUAL	DEPTH ACTUAL	MJH INPUT NG/LPG	KWH OUTPUT
SLR-X	1300 mm	870 mm	461 mm	SLP 219 mm	1219 mm	856 mm	451 mm	31.6 NG 27.4 LPG	8.6 NG 7.5 LPG

NOTE: Looking at the cavity provide a crimped/capped-off copper gas line close to the bottom left hand side within the opening. Single non-switch GPO/413 socket to be provided close to bottom right hand side within opening.

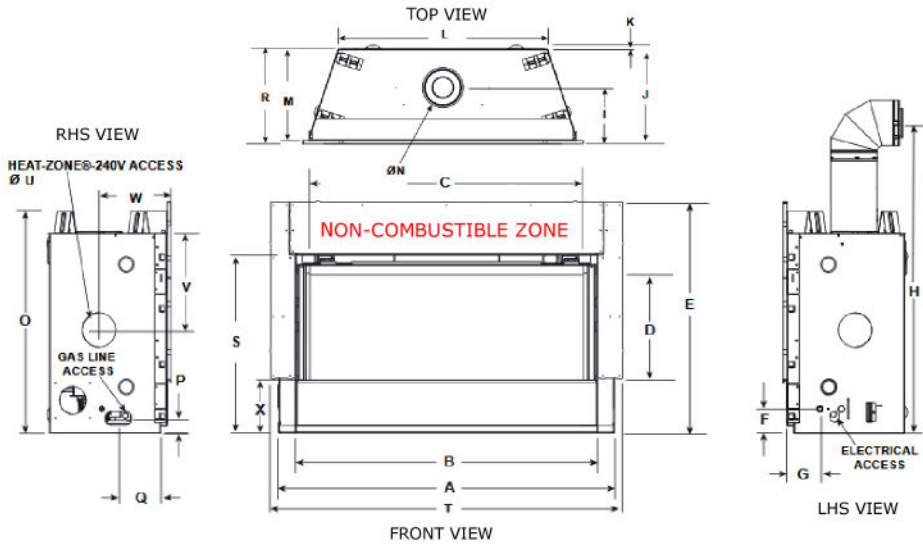

Framework Opening

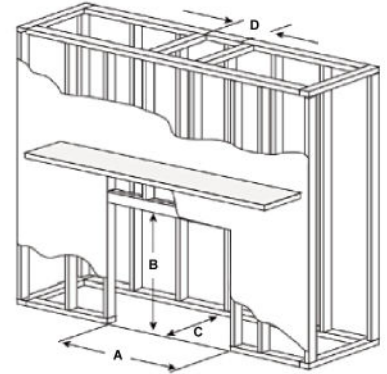


PLEASE NOTE
Unit must be installed prior to drywall. Framework opening is greater than drywall opening.

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X
1219	1092	992	387	856	89	178	1195	249	451	13	959	425	168	822	56	152	438	657	1283	127	356	270	197

Dimensions shown are in millimeters. Reference dimensions only. We recommend measuring individual units at installation. Assume the use of 10mm plaster. **NOTE:** combustible material should not be installed over the face. Make sure you do **NOT** cover the decorative door opening. Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserve the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Pictures in this brochure are not the true representation of the fireplace and/or flames.

Modern Marvel

Downtown, uptown and everywhere in between, when looks matter, it's your style. Mix and match with modern décor. A fireplace so cool, its hot and highly efficient at setting the mood.

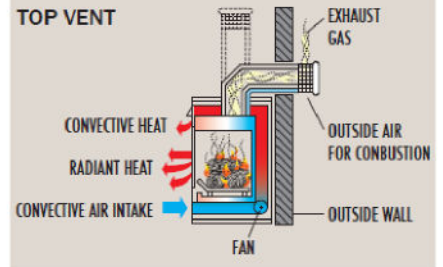

Shown with logs, black surround and standard interior



Shown with driftwood, black surround and reflective interior

FEATURES:



Multi-function remote control allows adjustment of flame height, fan speed and more



IntelliFire Plus electronic ignition system eliminates the need for a standing pilot



Optional reflective interior panels available



Choose from log, driftwood or pebble media



Balanced flue technology maintains optimum indoor air quality



Top or rear venting options provide installation flexibility



Available in natural gas and LPG



Zero clearance installation