# JETMASTER FREE STANDING METAL CASING "A"

Typical installation with exposed "flue" and or one length heat shield, refer to decro mesh diagram for firebox and flue clearances to combustibles.

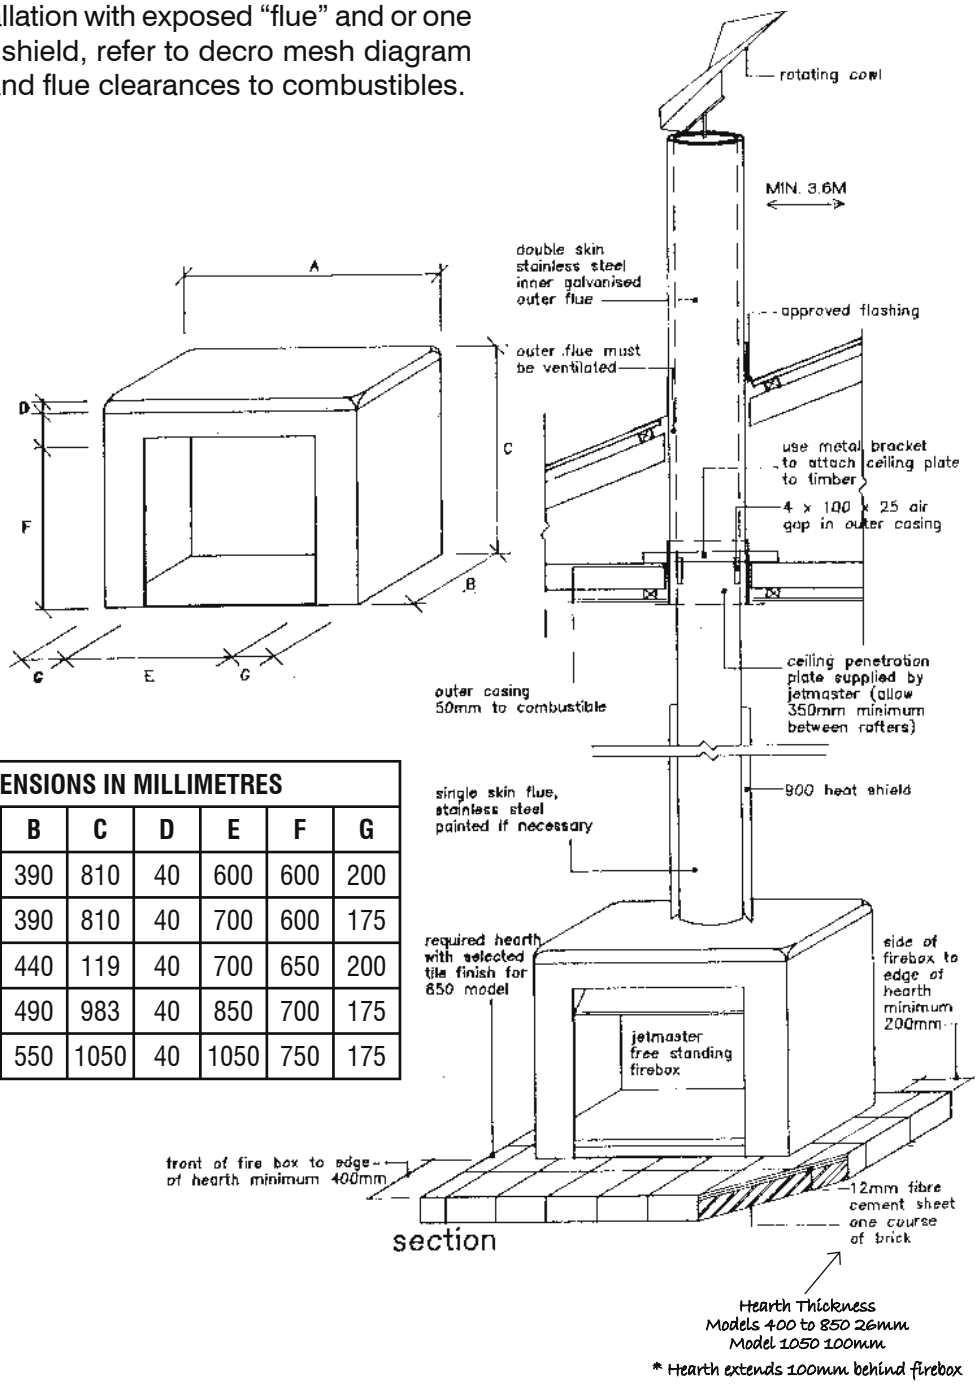


| DIMENSIONS IN MILLIMETRES | | | | | | | |
|---|---|---|---|---|---|---|---|
| MODEL | A | B | C | D | E | F | G |
| 600 | 1000 | 390 | 810 | 40 | 600 | 600 | 200 |
| 700S | 1050 | 390 | 810 | 40 | 700 | 600 | 175 |
| 700D | 1100 | 440 | 119 | 40 | 700 | 650 | 200 |
| 850 | 1200 | 490 | 983 | 40 | 850 | 700 | 175 |
| 1050 | 1400 | 550 | 1050 | 40 | 1050 | 750 | 175 |

# JETMASTER FREE STANDING METAL CASING "B"

**Typical installation with decro mesh heat shield to ceiling.**

| FIREBOX AND FLUE CLEARANCES TO COMBUSTABLES<br>Jetmaster 600, 700S,700D & 850 Freestanding | | | |
|---|---|---|---|
| | A | B | C |
| Flue Pipe | 250 | 175 | 50 |
| Flue Pipe with 900 Heat Shield | 100 | 175 | 50 |
| Flue Pipe with Decro Mesh | 100 | 175 | 50 |
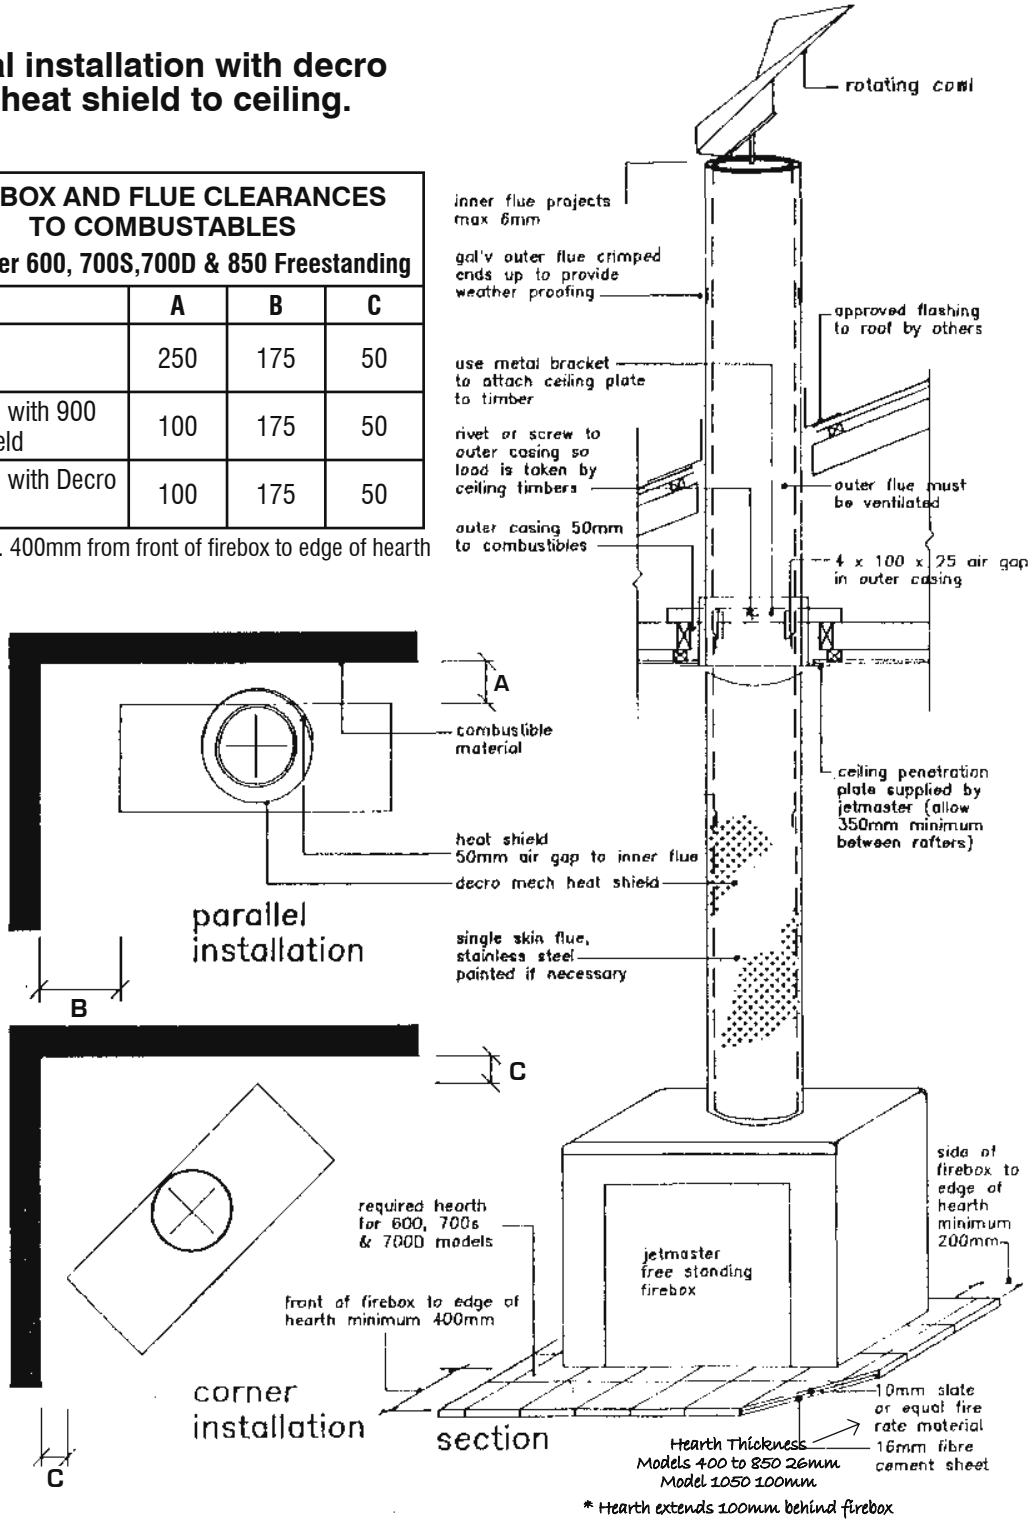
NOTE: min. 400mm from front of firebox to edge of hearth